

OKI

High Quality Reed Switches

www.osdc.co.jp/en/

OKI Reed Switch Product Line

Miniature Reed Switches

ORD213

ORD211

ORD219

Standard Reed Switches

ORD221

ORD2221

ORD324

ORD324H

ORD325

High Power Reed Switches

ORD229

ORD2210

ORD2210V

ORD872

Lamp Load Reed Switches

ORD2211

ORD2211H

Long Life Reed Switches

ORD228VL

ORD311

ORD312

SPDT Transfer Reed Switches

ORT551

SMD Reed Switches

ORD213S-1

ORD228S-1

 UL File No. E70063

ISO9001 & ISO14001 Certified




Reed-Rex LLC
4769 E. Wesley Drive
Anaheim, CA 92807
sales@reed-rex.com
(714) 970-2144

REED REX

sales@reed-rex.com • www.reed-rex.com

REED SWITCH DATA SHEET

ORD2211H

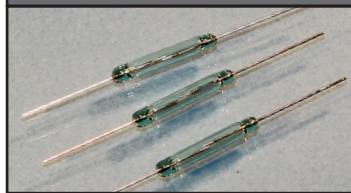


Long Lead Lamp Load OKI Reed Switch

ORD2211H is a 16mm single contact reed switch designed for direct opening or closing 12V, 3.4 watt lamp circuits. Pull-in 20-40 AT, This reed switch is identical to ORD2211 but has longer terminals, 56.7mm compared to 44.1mm Drop-out minimum 8 AT. Contact rated for 50

Volt-Amps. Made with Rhodium (Rh) contacts engineered for long life. Very low contact resistance (CR) less than 100mΩ. Can switch or carry as low as 10 nano-Volts (10^{-9} Volts) without signal loss. Can switch or carry as low as 1 femt-Amp (10^{-15} Amps) without signal loss. Electrostatic Capacitance is less than 0.3 pF. Consumes no power in open position. Insulation Resistance is above 1 giga-ohm ($10^9 \Omega$).

Operation Temperatures: -55°C (-67°F) to +100°C (212°F). Tolerant of harsh environments including salt spray, water, humidity, gaseous & chemical fumes, oil, fuel, and dust-laden atmospheres. Shock resistant above 20Gs.

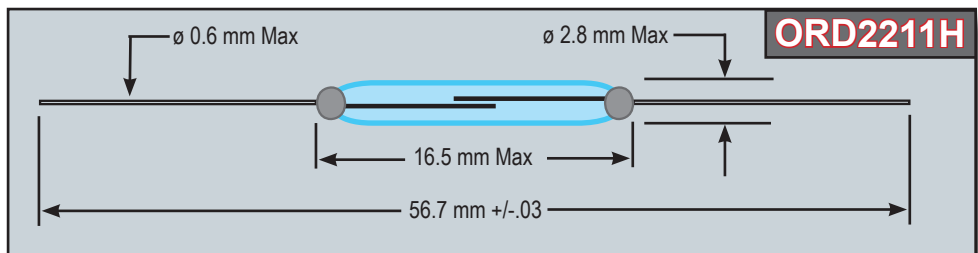

Parameter	Specification	Unit of Measure
Pull In Value (PI)	20-40	Ampere Turns (AT)
Drop Out Value (DO)	8 minimum	Ampere Turns (AT)
Contact Resistance	100 maximum	Milliohms (mΩ)
Breakdown Voltage	200 minimum	Volts DC (VDC)
Insulation Resistance	10^9 minimum	Ohms (Ω)
Electrostatic Capacitance	0.3 maximum	Picofarads (pF)
Contact Rating	50 (12v 3.4W)	Watts / Volt Amps
Max Switching Voltage	100 DC / 100 AC	Volts (V)
Max Switching Current	.5	Amps (A)
Max Carry Current	2.5	Amps (A)
Response Time	0.6 maximum	Milliseconds (ms)
Bounce Time	0.4 maximum	Milliseconds (ms)
Release Time	0.05 maximum	Milliseconds (ms)
Resonant Frequency	4,600 +/-400	Hertz (Hz)
Max Operating Frequency	500	Hertz (Hz)
Minimum Expected Switch Life	1 billion switches	6 VDC @ 10mA

For Additional Specifications, www.reed-rex.com/okireedswitchdatabook